40W isolated AC-DC converter with ultra-wide, ultra-high 85 - 900VAC input for coalmine



RoHS

FEATURES

- Specially designed for electrical equipment in coal mining industry
- Ultra-wide 85 900VAC input voltage range
- High I/O isolation test voltage of 4000VAC
- High reliability, high efficiency, long lifespan
- Output short circuit, over-current and over-voltage protection
- Immunity, EFT/Surge: ±4KV perf. Criteria B

PVA40-27Bxx series is a special power supply designed for customers who provide electrical equipment for coal mining industry to meet the requirements of safety in providing power supply, easy mounting and technology innovation etc. It features ultra-wide input voltage range from 85 to 900VAC which covers 127/220/380/660VAC used in coal mining industry, high isolation voltage, excellent EMS performance, multiple protections and high efficiency. They are widely used in monitoring and security sectors of coal mining industry.

Selection Guide					
Part No.	Part No. Output Power		Efficiency at 380VAC (%) Typ.	Capacitive Load (µF) Max.	
PVA40-27B18	40W	18V/2222mA	86	1000	
PVA40-27B24	40W	24V/1667mA	86	800	
PVA40-27B30	40W	30V/1333mA	86	600	

Input Specification	ns				
Item Operating Conditions		Min.	Тур.	Max.	Unit
Input Voltage Range		85		900	VAC
	127VAC	-		0.85	
Input Current	380VAC	_		0.55	
	660VAC	_		0.35	Α
Inrush Current	660VAC	_		140	
iniusn Currem	900VAC	_		180	
External input Fuse			2A/1000VA	C, required	
Hot Plug	Unavailable				

Output Specifications							
Item	Operating Conditions	Operating Conditions			Max.	Unit	
Output Voltage Accuracy	All load range			±2			
Line Regulation	Rated load		-	±l		%	
Load Regulation	10% - 100% load	0% - 100% load		±l	-		
Ripple & Noise*	20MHz bandwidth (pea	20MHz bandwidth (peak-to-peak value)		100	200	mV	
Temperature Coefficient			_	±0.02		%/ °C	
Short Circuit Protection			Hiccup, continuous, self-recovery				
Over-current Protection				≥110%lo, hiccup, self-recovery			
	18V output 24V output 30V output			≤30VDC			
Over-voltage Protection			≤35VDC				
			≤45VDC				
Min. Load			0	-		%	
Halalous Tasas	Room temperature,	380VAC input	_	60			
Hold-up Time	Full load	660VAC input		240		ms	
Note: * The "Tip and barrel method" is used for ripple and noise test, please refer to PV Converter Application Notes for specific information.							

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.


PVA40-27Bxx Series


General Specifications							
Item		Operating Conditions	Min.	Тур.	Max.	Unit	
Isolation Test	Input - output	Electric Strength Test for 1min., leakage current ≤3mA	4000			VAC	
Insulation Resis	tance	500VDC		≥50x10 ⁶		Ω	
Operating Tem	perature		-25		+70	°C	
Storage Tempe	erature		-40		+85		
Storage Humidity					95	%RH	
		-25℃ to -10℃	2.7			0/ /°0	
D D#	_	+50°C to +70°C	2.0			%/ °C	
Power Derating	9	85V-100VAC	2.0				
Switching Frequency		850V-900VAC	0.3			%/VAC	
				65		kHz	
MTBF			MIL-HDBk	(-217F@25°C	≥300,000 h	'	

Mechanical Specifications		
Dimensions	138.00 x 82.00 x 32.00mm	
Weight	240g(Typ.)	
Cooling method	Free air convection	

Electromaç	ectromagnetic Compatibility (EMC)						
	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B			
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A			
Immunity	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria B			
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria B			
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A			

Product Characteristic Curve







Note: ① With an input between 85 - 100VAC/850 -900VAC, the output power must be derated as per temperature derating curves;

② The point-solution capacitors have a constant lifetime, the service life depends on the actual ambient temperature, operating in harsh environments can affect the life of a product, shorten the service life of the product, it is not recommended that the product work in high temperature environment below 65°C for a long time.


3 This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.





Design Reference

1. Typical application




Model	FUSE	C1	C2	R	
PVA40-27Bxx	2A/1000VAC, required	1uF	10uF	1.4Ω/≥5W	

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C1 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C2 is a ceramic capacitor used for filtering high-frequency noise.

2. Trim Function for Output Voltage Adjustment (open if unused)



TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:


up:
$$RT = \frac{aR_2}{R_2 - a} - R_3$$
 $a = \frac{Vref}{Vot - Vref} \cdot R_1$ $RT = Trim Resistor value;$ $a = Self-defined parameter;$ down: $RT = \frac{aR_1}{R_1 - a} - R_3$ $a = \frac{Vot - Vref}{Vref} \cdot R_2$

		V101			
Vout	R1(K Ω)	R2(K Ω)	R3(K Ω)	Vref(V)	Vot(V)
18V	6.20	1	1	2.5	Resulting trimmed
24V	8.66	1	1	2.5	output voltage,
30V	8.80	0.79	1	2.5	range ≤ ±10%


3. For more information Please find the application notes on www.mornsun-power.com




Dimensions and Recommended Layout

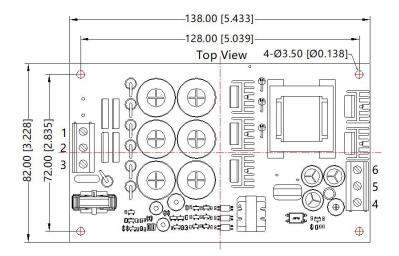







Note:

Unit: mm[inch]

Wire range: 24~12AWG

Tightening torque: Max 0.4N·m General tolerances: ±1.00[±0.039]

The layout of the device is for reference only,

please refer to the actual product

Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220072;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
- 3. All index testing methods in this datasheet are based on our company corporate standards;
- 4. We can provide product customization service, please contact our technicians directly for specific information;
- 5. Products are related to laws and regulations: see "Features" and "EMC";
- 6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com