

### Typical Features

- ◆ Wide input voltage range (4:1), Output power 6W
- ◆ Transfer efficiency up to 82%
- ◆ Continuous short circuit protection, Self-furbish
- ◆ Input under-voltage, output over voltage, short circuit, over current protection
- ◆ Switching Frequency: 300KHz
- ◆ Isolation voltage: 1500VDC
- ◆ Operating Temperature range: -40°C~+85°C
- ◆ Good EMI performance



**Test Condition:** Unless otherwise specified, data in the datasheet should be tested under the conditions of inputting nominal voltage, pure resistance rated load and Ta=25°C.

### Application Filed

**UD6-XXDXXE3** is a newly designed DIP packed of 31.8\*20.3, 6W output power, wide input range 4:1, isolated regulated single output DC-DC converter, could be widely used for industrial control, instrument, communication, power electricity, thins of Internet field. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

### Typical Product List

Part No.	Input Voltage Range (Vdc)		Output Voltage/Current(Vo/Io)		Input Current (mA) Nominal Voltage		Max. Capacitive Load uF	Ripple & Noise		Efficiency (%)@output full load,input nominal	
	Nominal	Range	Voltage (Vdc)	Current(mA)MA X./Min.	Full load Typ.	No load Typ.		mVp-p		Min	Typ
								Typ.	Max.		
*UD6-18D3V3E3	18	9-36	±3.3	±600/0	290	20	220	30	100	74	76
UD6-18D05E3			±5	±600/0	417	20	220	30	100	78	80
*UD6-18D09E3			±9	±333/0	407	20	100	30	100	80	82
UD6-18D12E3			±12	±250/0	407	20	100	30	100	80	82
UD6-18D15E3			±15	±200/0	407	25	33	30	100	80	82
*UD6-18D24E3			±24	±125/0	407	25	22	30	100	80	82
*UD6-36D3V3E3	36	18-75	±3.3	±600/0	145	10	220	30	100	74	76
UD6-36D05E3			±5	±600/0	208	10	220	30	100	78	80
*UD6-36D09E3			±9	±333/0	203	10	100	30	100	80	82
UD6-36D12E3			±12	±250/0	203	10	100	30	100	80	82
UD6-36D15E3			±15	±200/0	203	13	33	30	100	80	82
*UD6-36D24E3			±24	±125/0	203	13	22	30	100	80	82

Note 1: "\*" is model under developing;

Note 2. Max capacitive load is, when the power supply is fully loaded, the max capacity could be connected to output, if exceed, the power supply cannot start-up;

### Input Specifications

Stand-by Power Consumption	0.5W (Typ.)
Input Filter	π filter

### Output Specifications

Output Voltage Accuracy	Full voltage range	Vo1: ±2.0%(Max)	
		Vo2: ±3.0%(Max)	
Voltage Regulation	Nominal load, full voltage range	Vo	≤±0.5%
Load Regulation	10% ~ 100% nominal load	Vo	≤±1.0%
Ripple & Noise*	Nominal Load, Nominal Voltage, twisted pair test method, 20MHz bandwidth		50mVp-p Typ, 100mVp-p
Output Over voltage protection	110%~140%Vo		
Output Over load protection	120%~220%		
Output Short Circuit Protection	Self-recovery in 5 Seconds		
Dynamic Response	25% nominal load step change	ΔVo/Δt	≤6%/500μs
Output Voltage Adjustment	Not Available		
Turn-on delay time	Typical	500ms	
Output Turn-on Overshoot Voltage			≤10%Vo

### General Specification

Switching Frequency	Typical	300KHz
Operating Temperature	Refer to temperature derating curves	-40°C ~ +85°C
Storage Temperature	-55°C ~ +125°C	
Max Case Temperature	Within Operating Curve	+105°C
Relative Humidity	No condensing	5%~95%
Case Material	Black Aluminum Metal Case	
Cooling Method	Free air convection	
Isolation Voltage	Input to Output	1500Vdc ≤ 0.5mA / 1min
Meantime Between Failure	MIL-HDBK-217F@25°C	2X10 <sup>5</sup> Hrs
Product Weight	Average	15g


/



### EMC Characteristics

Total Items	Sub Items	Test Standard	Class
EMC	EMI	CE	CLASS B (see recommended circuit photo②)
		RE	CLASS B (see recommended circuit photo②)
	EMS	RS	10V/m Perf.Criteria B (see recommended circuit photo②)
		CS	3Vr.m.s Perf.Criteria B (see recommended circuit photo②)
		ESD	Contact ±4KV Perf.Criteria B
		Surge	±2KV Perf.Criteria B (see recommended circuit photo①)
		EFT	±2KV Perf.Criteria B (see recommended circuit photo①)

### Packing Dimension

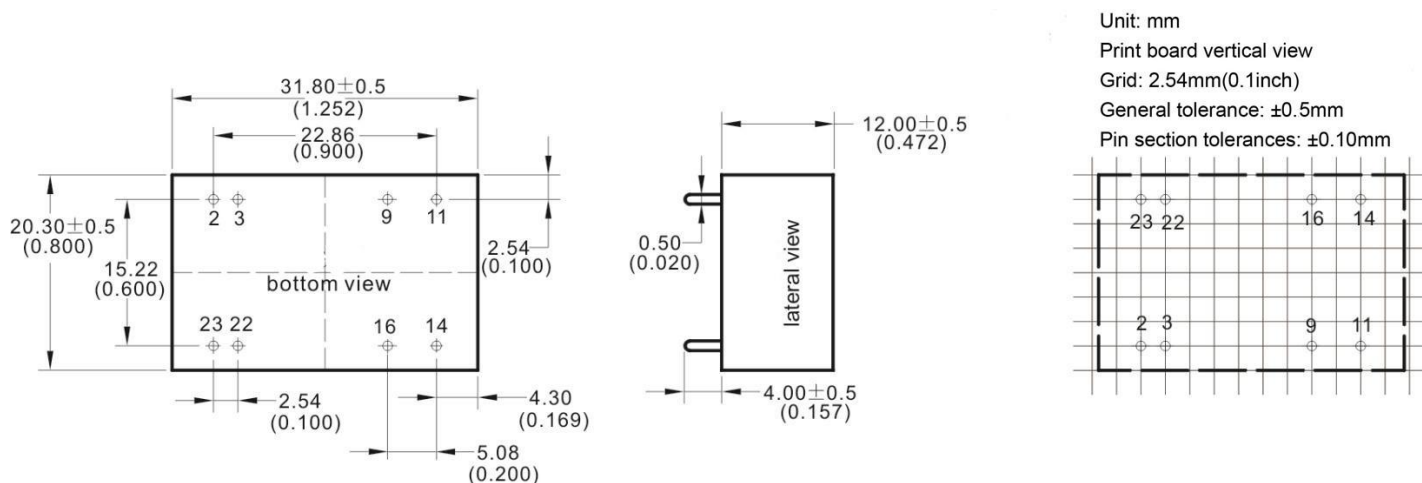


Packing Code	L x W x H	
E3	31.80 x 20.30 x 12mm	1.252 x 0.800 x 0.472inch

### Pin-out

Dual (D)	2、3	22、23	14	16	9	11
	-Vin	+Vin	+Vo	GND	GND	-Vo

Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.


### Product Characteristic Curve

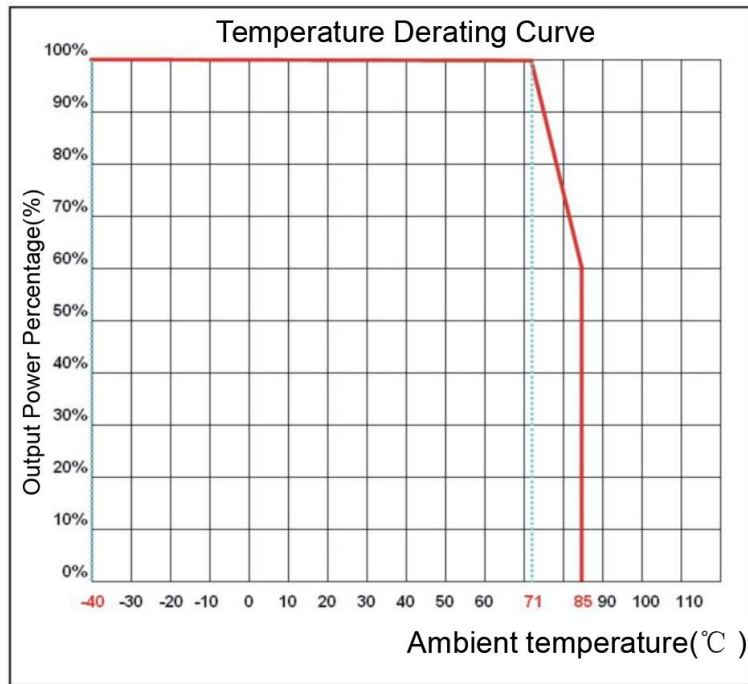

**Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)**

Test Method:

- a. 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
- b. Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

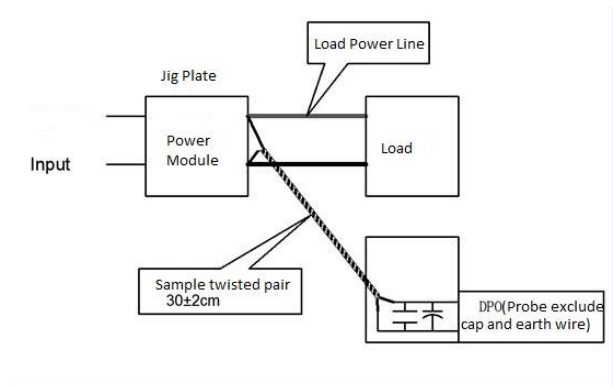


**Design and Application Reference**

**Recommended circuit**


1. DC/DC test circuit

Normal recommended capacitors: C0:47-100uF; C1:470uF.

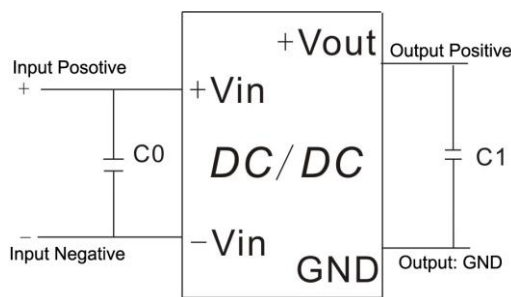


2. Input reflecting ripple current test circuit:

Capacitor C choose low ESR ones, withstand voltage value should be bigger than max input voltage;

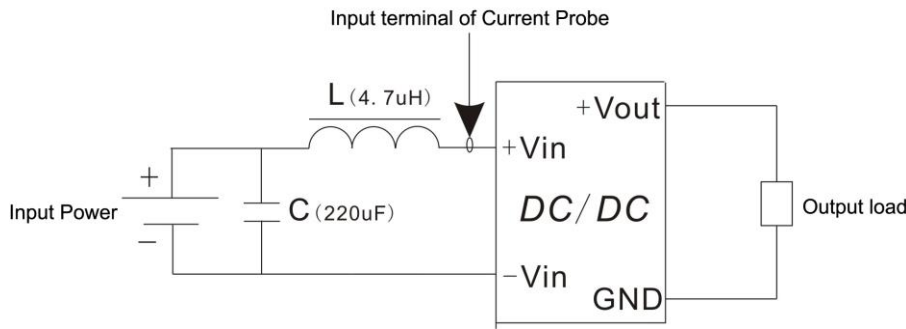

3. EMC External Recommended Circuit:

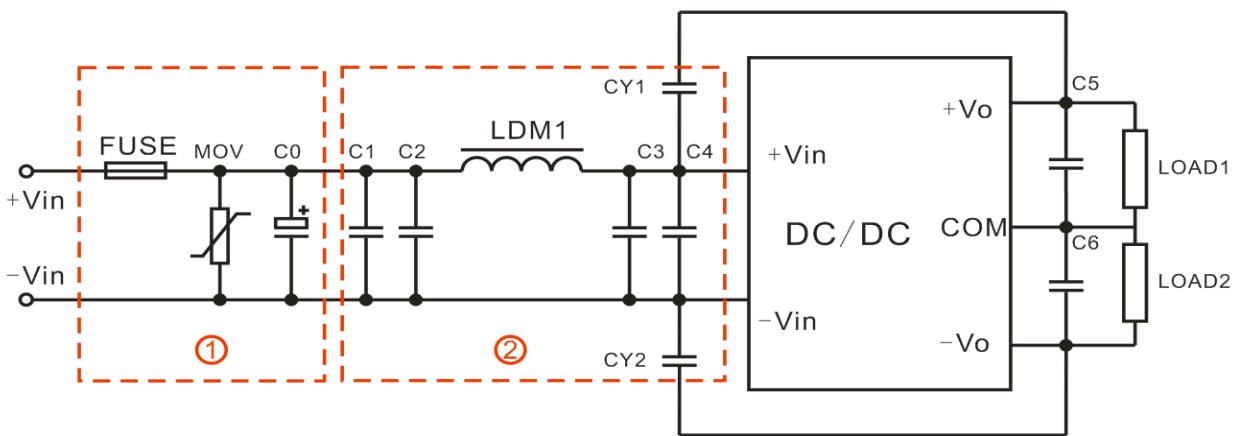

Recommended Spec:

Component	18V Input	36V Input
FUSE	According to customer's request	
MOV	14D560K	14D101K
C0	470uF/50V	470uF/50V
C1,C2,C3,C4,C5,C6	10uF/50V	10uF/50V
LDM1	10uH	10uH
CY1,CY2	1nF/2000V	

Note:

1. The product should be used under the specification range, otherwise it will cause permanent damage to it.
2. If the product worked beyond the load range or below the minimum load, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
3. Unless otherwise specified, data in this datasheet should be tested under conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
4. All index testing methods in this datasheet are based on our Company's corporate standards
5. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
6. We can provide customized product service;
7. The product specification may be changed at any time without prior notice.