

DC/DC Converter

PV15-29BxxR3 Series

MORNSUN®

15W isolated DC-DC converter with ultra-wide, ultra-high 200 - 1500V DC input for renewable energy



FEATURES

- Input voltage up to 1600VDC (Transient, duration : 10s)
- Ultra wide input voltage range: 200 - 1500VDC
- Industrial grade operating temperature: -40°C to +70°C
- High I/O isolation test voltage of 4000VAC
- High efficiency, low ripple & noise
- Input under-voltage protection, reverse input voltage protection, output short circuit, over-current, over-voltage protection
- Designed to meet UL1741, CSA-C22.2 No.107.1, EN62109 standards
- EN62109 safety approval
- Reinforced insulation

PV15-29BxxR3 series is regulated DC-DC converters with an ultra-wide DC input of 200-1500VDC. The products feature high efficiency, high reliability, high insulation and high level of safety. This type of power supply is widely used in renewable energy industries such as photovoltaic, power generation, energy storage, inverters and high-voltage DC conversions. The converters provide multiple protection features and guarantee stable and safe operating environments even under abnormal working conditions. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 800VDC (%) Typ.	Capacitive Load (μF) Max. (Normal temperature full load)
EN62109-1	PV15-29B05R3	10W	5V/2000mA	64	6000
	PV15-29B12R3	15W	12V/1250mA	71	2000
	PV15-29B15R3		15V/1000mA	80	1200
	PV15-29B24R3		24V/625mA	83	470

Note: *Use suffix "A5" for chassis mounting and suffix "A6" for DIN-Rail mounting.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range		200	800	1500	VDC
	Transient (10s)	--	--	1600	
Input Current	200VDC	--	--	120	mA
	800VDC	--	--	30	
	1500VDC	--	--	16	
Inrush Current	200VDC	--	30	--	A
	1500VDC	--	90	--	
Under-voltage Protection		Lockout activation range: 130 - 175V Lockout deactivation range: 155 - 200V			
Reverse input voltage protection		Available			
External Input Fuse Required		4A/1500VDC, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		--	±2	--	%
Line Regulation	Full load	--	±1	--	
Load Regulation	0% - 100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	--	150	mV

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

Temperature Coefficient		--	±0.02	±0.15	%/°C
Short Circuit Protection		Continuous, self-recovery			
Over-current Protection		≥ 120%Io, self-recovery			
Over-voltage Protection	PV15-29B05R3	≤ 8VDC			
	PV15-29B12R3	≤ 20VDC			
	PV15-29B15R3	≤ 20VDC			
	PV15-29B24R3	≤ 30VDC			
Minimum Load		0	--	--	%
Start-up Delay Time**	200 - 1500VDC	--	--	2	s
Hold-up Time	Room temperature, full load	800VDC input	--	20	ms

Note: The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.
 ** Start-up delay time Test conditions: full voltage input range, full output load range (The cooling-time between input power-off and power-on again is greater than 15s.)

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output	Electric Strength Test for 1min., leakage current <3mA	4000	--	--	VAC
Operating Temperature			-40	--	+70	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Temperature	Wave-soldering		260 ± 5°C; time: 5 - 10s			
	Manual-welding		360 ± 10°C; time: 3 - 5s			
Power Derating	-40°C to 0°C	200 - 300VDC	PV15-29B05/12/15R3	0.75	--	% / °C
	+50°C to +70°C		PV15-29BxxR3	1.5	--	
	2000m - 5000m			6.7	--	%/Km
Switching Frequency			--	65	--	kHz
Altitude			--	--	5000	m
Safety Standard			UL1741, CSA-C22.2 No.107.1, EN62109			
Safety Certification			EN62109			
MTBF			MIL-HDBK-217F@25°C ≥ 300,000 h			




Mechanical Specifications

Case Material	Black flame-retardant and heat-resistant plastic (UL94V-0)	
Dimensions	Horizontal package	89.00 x 63.50 x 25.00 mm
	A5 chassis mounting	135.00 x 70.00 x 33.50 mm
	A6 DIN-Rail mounting	135.00 x 70.00 x 39.00 mm
Weight	Horizontal package	200g (Typ.)
	A5 chassis mounting	280g (Typ.)
	A6 DIN-Rail mounting	350g (Typ.)
Cooling method	Free air convection	



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (See Fig. 2 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (See Fig. 2 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria B
	EFT	IEC/EN61000-4-4	±2KV ±4KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±1KV line to line ±2KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A

Product Characteristic Curve

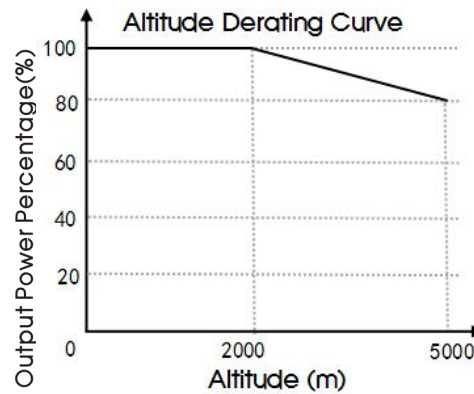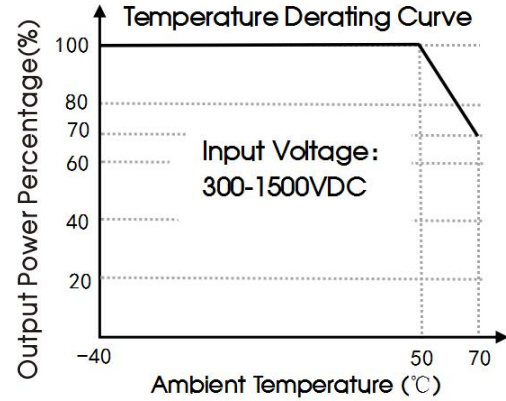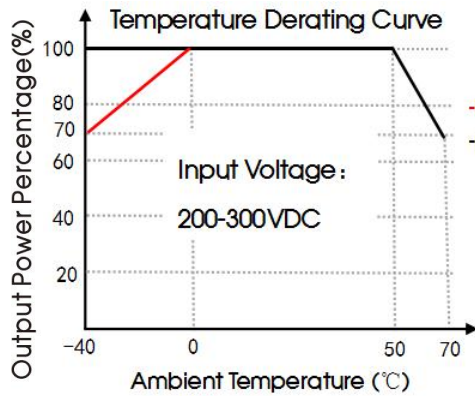

- Note:
- ① For operation of this converter series in an altitude between 2000 - 5000m above sea level, the output power must be derated as per the altitude derating curve;
 - ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

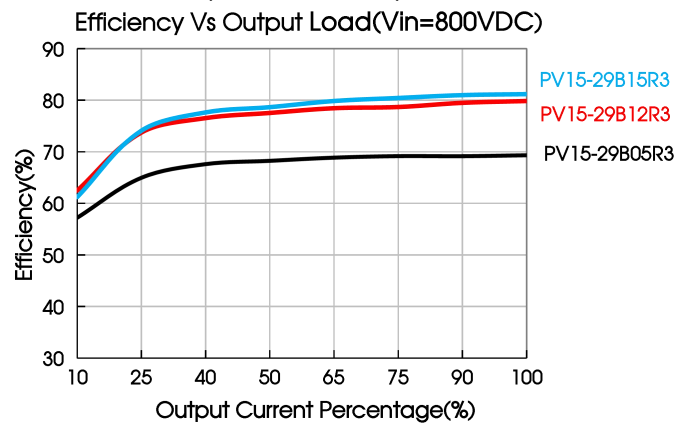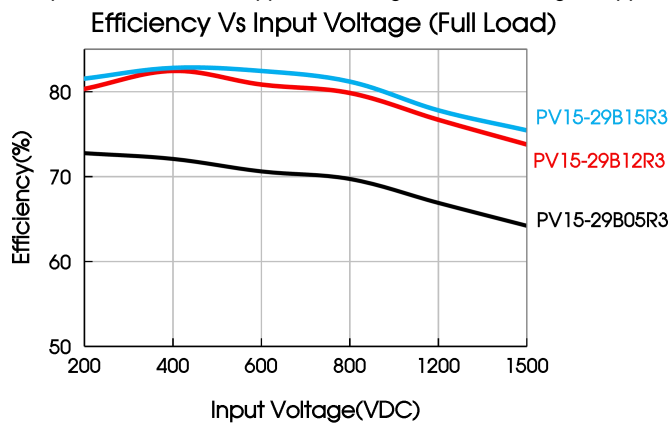

Design Reference

1. Typical application

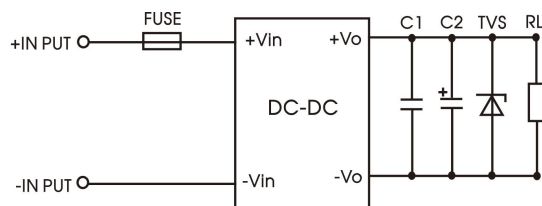


Fig. 1: Typical application circuit

Model	FUSE	C1(μF)	C2(μF)	TVS
PV15-29B05R3	4A/1500VDC, required	1μF/35V	120μF/35V	SMBJ7.0A
PV15-29B12R3			120μF/35V	SMBJ20A
PV15-29B15R3			120μF/35V	SMBJ20A
PV15-29B24R3			68μF/35V	SMBJ30A

Note on filter components:

We recommend using an electrolytic capacitor with high frequency and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor, used to filter high-frequency noise. TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

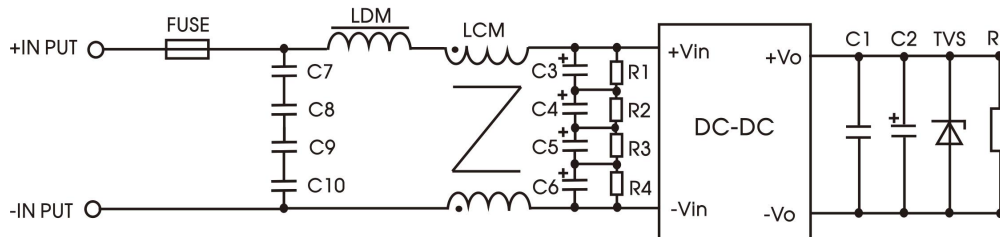



Fig 2: EMC application for higher compliance requirements (output parameters are show in Figure 1)

Component	Recommended value
C7, C8, C9, C10	Safety capacitor 104K/275VAC
C3, C4, C5, C6	10uF/450VDC
R1, R2, R3, R4	1M Ω /2W
LDM	330uH/1A
LCM	7mH/1A
FUSE	4A/1500VDC, required


3. For additional information please refer to application notes on www.mornsun-power.com.

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

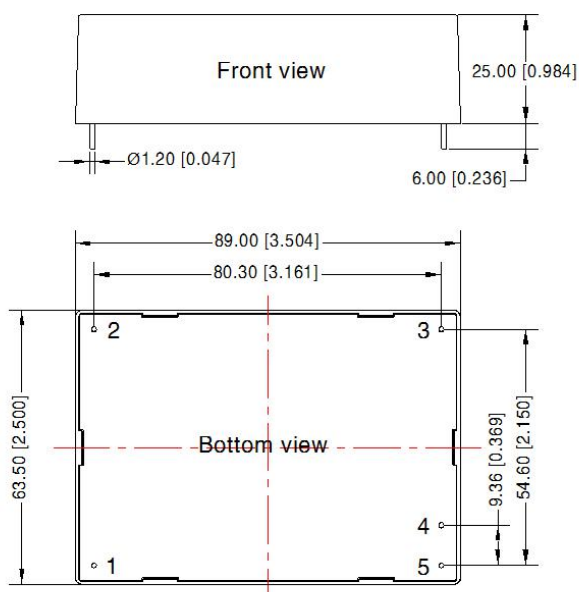


Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.50 [\pm 0.020]$

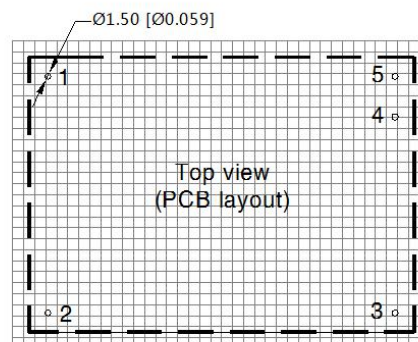

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	-Vin
2	+Vin
3	NC
4	-Vo
5	+Vo

A5 Chassis Mounting Dimensions

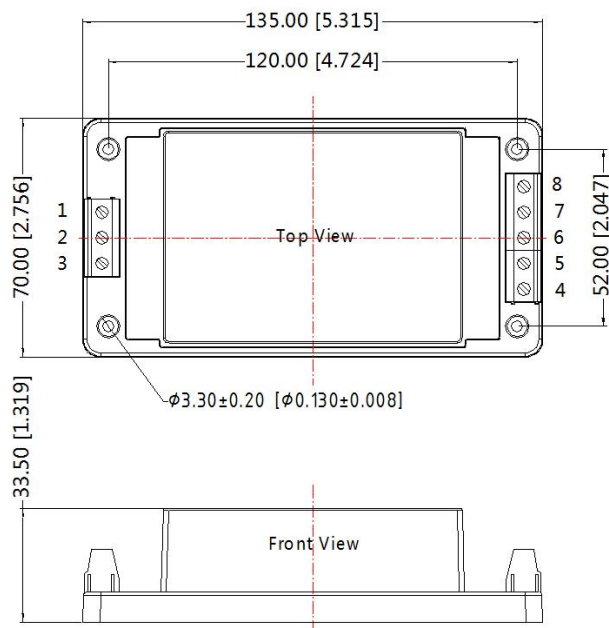

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	-Vin
2	NC
3	+Vin
4	NC
5	NC
6	NC
7	-Vo
8	+Vo

Note:


Unit: mm[inch]

Wire range: 24-12 AWG

Tightening torque: Max 0.4 N·m

General tolerances: ± 1.00 [±0.040]

A6 Din-Rail Mounting Dimensions

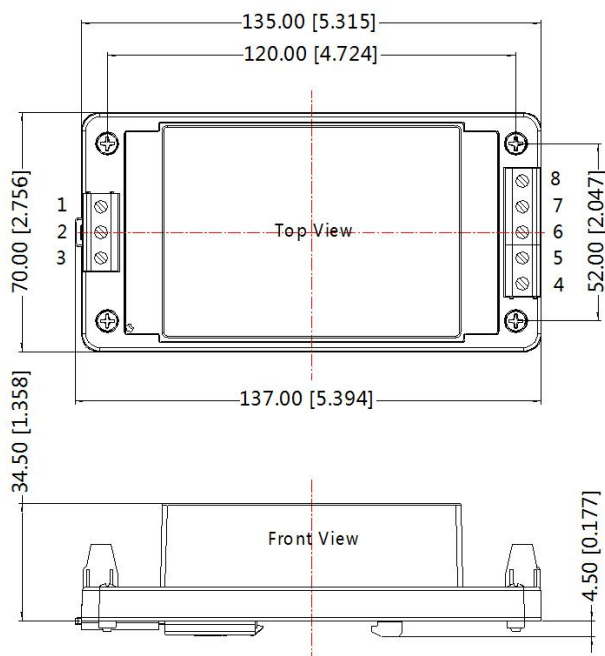

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	-Vin
2	NC
3	+Vin
4	NC
5	NC
6	NC
7	-Vo
8	+Vo

Note:

Unit: mm[inch]

Wire range: 24-12 AWG

Tightening torque: Max 0.4 N·m

Mounting rail: TS35, rail needs to connect safety ground

General tolerances: ± 1.00 [±0.040]

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number of Horizontal package: 58220021; the packaging bag number of A5/A6 package: 58220031;
2. Unless otherwise specified, A5/A6 products performance are consistent with Horizontal package products;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency, there will be audible noise generated when working at input voltage higher than 1000 VDC, but it does not affect product performance and reliability;
6. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
7. We can provide product customization service;
8. Products are related to laws and regulations: see "Features" and "EMC";
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com